




夾軸式時規皮帶輪 CLAMPING TIMING PULLEYS <3M.5M.8M>

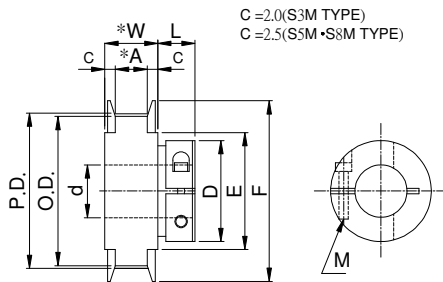

TYPE	本體材質	表面處理	法蘭材質	法蘭處理
CLAA	A6061	陽極	S45C	鍍鋅
CLAAA			A6061	陽極
CLAD		黑色陽極	S45C	鍍鋅
CLADA			A6061	黑色陽極
CLAH		硬陽	S45C	鍍鋅
CLAHA			A6061	硬陽

▲3M 型

Type	Catalog No.		d 選擇	P.D	O.D	D	F	E	L	夾鉗螺栓		
	齒數	對應皮帶								M	緊固扭矩	
CLAA CLAAA CLAD CLADA CLAH CLAHA	24	3M007 A: 7 W: 11	4	22.92	22.16	13	25	16	9	2	0.4	
	26		4	24.83	24.07		28	18				
	28		4	26.74	25.98		30	20				
	30		6.8	28.65	27.89		32	23				
	32	6.8	30.56	29.80	35	25	12.5	3	1.5			
	36	6.8	34.38	33.62	40	28						
	40	8.10	38.20	37.44	44	32						
	44	8.10	42.02	41.25	48	36						
	48	8.10.11.12	3M011 A: 11 W: 15	8.10.11.12	45.84	45.07	33	50	38	14	4	3.5
	50	8.10.11.12.13.14		47.75	46.98	36	52	40	15.5	5	6	
60	8.10.11.12.13.14.15.16	57.30		56.53	41	61	46					

▲5M 型

Type	Catalog No.		d 選擇	P.D	O.D	D	F	E	L	夾鉗螺栓		
	齒數	對應皮帶								M	緊固扭矩 (N·m)	
CLAA CLAAA CLAD CLADA CLAH CLAHA	24	5M011 A: 11 W: 16	8.10	38.20	37.24	26	45	30	12.5	3	1.5	
	25		8.10	39.79	38.83							
	26		8.10	41.38	40.42							
	28		8.10	44.56	43.60							
	30		10	47.75	46.79							
	32		10.11.12.13.14	50.93	49.97							
	34		10.11.12.13.14.15.16	54.11	53.15							
	36		10.11.12.13.14.15.16	57.30	56.34							
	40		10.11.12.13.14.15.16.17.18.19	63.66	62.70							
	44		12.13.14.15.16.17.18.19	70.03	69.07							46
	48	20.21.22.23.24	55			16.5	6	12				
	48	12.13.14.15.16.17.18.19	5M017 A: 17 W: 22	12.13.14.15.16.17.18.19	76.39	75.43	46	83	63	15.5	5	6
	50	20.21.22.23.24.25		55	16.5	6	12					
	50	12.13.14.15.16.17.18.19		46	87	67	15.5	5	6			
60	20.21.22.23.24.25	55		16.5	6	12						
60	12.13.14.15.16.17.18.19	95.49	94.53	46	99	80	15.5	5	6			
60	20.21.22.23.24.25			55	16.5	6	12					

▲8M 型

Type	Catalog No.		d 選擇	P.D	O.D	D	F	E	L	夾鉗螺栓	
	齒數	對應皮帶								M	緊固扭矩 (N·m)
CLAA CLAAA CLAD CLADA CLAH CLAHA	20	8M017 A: 17 W: 22	12.13.14	50.93	49.56	36	58	40	14	4	3.5
	22		12.13.14.15.16	56.02	54.65	41	61	45	16	5	6
	24		12.13.14.15.16.17.18.19	61.12	59.74	46	67	50			
	25		12.13.14.15.16.17.18.19	63.66	62.29		70	56			
	28		15.16.17.18.19	71.30	69.93	55	80	60			
	30		20.21.22.23.24.25			46	87	67	16	5	6
	32		18.19	55	17	6			12		
	34		20.21.22.23.24.25	46	16	5			6		
	36		18.19	86.58	85.21	46			95	75	16
	36		20.21.22.23.24.25	91.67	90.30	55	99	80	17	6	12
	36	18.19	46			16			5	6	
	36	20.21.22.23.24.25	55	17	6	12					

Order TYPE — Catalog No. — 孔徑d

訂購範例 CLAAA — 305M017 — 10

註1：如需特殊加工請來電告知

