



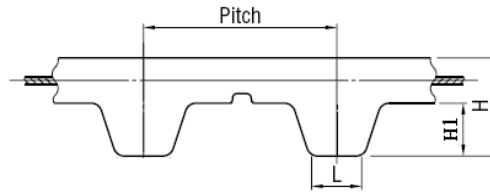


各齒形開放式時規皮帶

XL-L-H T5-T10



S3M-S5M-S8M 3M-5M-8M 3GT-5GT-8YU

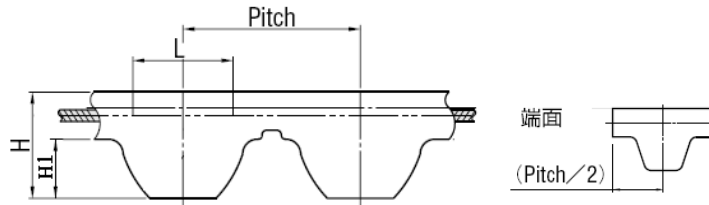

使用溫度範圍

- 20°C~80°C

TYPE	本體	心線
BTOP	黑色合成橡膠	玻璃線
BTOPPU	白色PU優力膠	鋼絲

Type	Catalog No.		皮帶齒數 下限~上限	皮帶寬度 (mm)	最長 M	Pitch	H	H1	L
	皮帶齒形	皮帶寬度mm							
BTOP BTOPPU	XL	025	30~5905	6.4	30	5.08	2.25	1.25	1.35
		037		9.5					
		050		12.7					
	L	050	30~3149	12.7		9.525	3.5	1.9	3.2
		075		19.1					
		100		25.4					
	H	075	45~2362	19.1		12.7	4.3	2.3	4.4
		100		25.4					
		150		38.1					
		200		50.8					
	S3M/3M/3GT	006	40~10000	6		3	2	1.14	1.95
	S5M/5M/5GT	010	50~6000	10		5	3.81	1.81	3.25
		015		15					
		025		25					
	S8M/8M/8YU	015	60~33750	15		8	5	2.85	5.2
		025		25					
		030		30					
		040		40					
	T5	010	40~6000	10		5	2.2	1.2	1.8
		015		15					
		020		20					
		025		25					
	T10	015	40~3000	15		10	4.5	2.5	3.5
		020		20					
		025		25					
		030		30					

Order TYPE — Catalog NO. — 齒數

訂貨代號 BTOPPU — L100 — 2000